



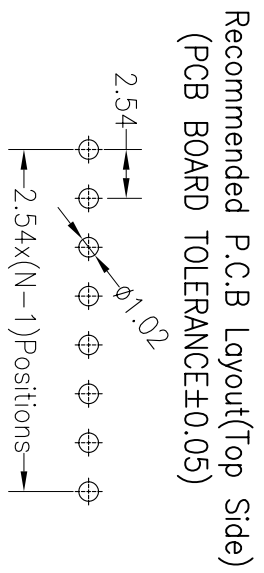

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

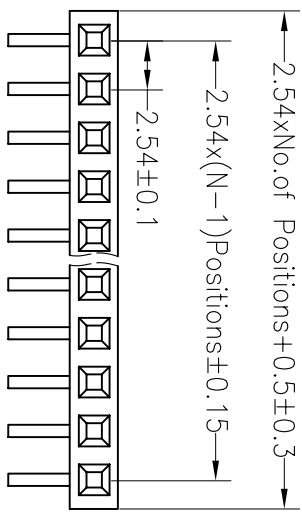

Ordering Information

2257 01 XX X N XX R Y X 01

No. of Pins Per Row 1*40
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Packing
 0=PE Bog
 T=Tube
 P=Tube+Cap

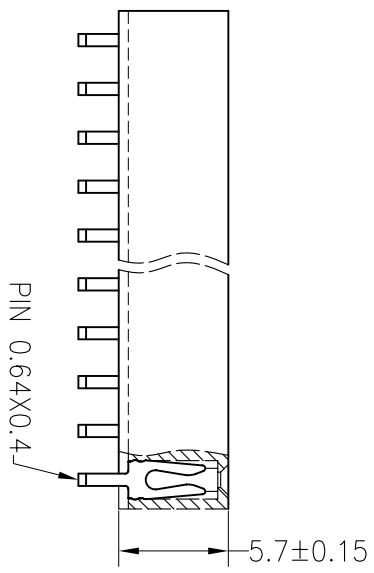

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	YTYuSheng	15.03.28	SCALE	FIT	PART NO.	TITLE:
	A0	2015.03.28	NEW DRAWING									
B					X.XX	±0.20	CHECK		SIZE			
					X.XXX	±0.10			SHEET	1/1		
C					Angle	±3°	APPROVE		PROJ.			
					DIM	TOL						
D	1	2	3	4	5	6	7	8	9			

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992