





SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

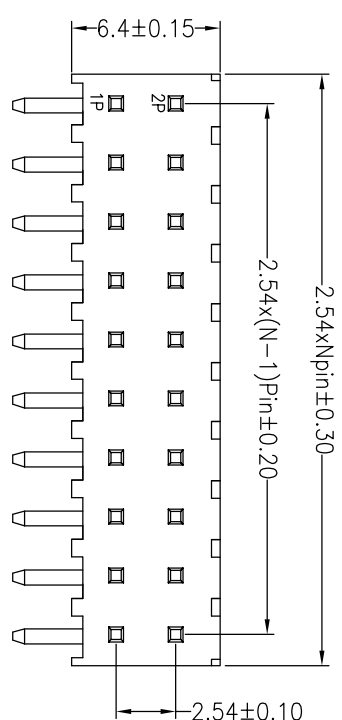



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

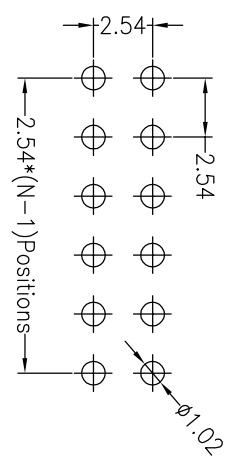

Ordering Information

1274-12 XX X N XX R XXX X01

- No. of Pins: 2x40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Contact Plating: G0:Gold Flash, G1:3U" Gold, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold
- Pin Length: SN:Tin
- Packing: 0=PE Bag, A=Troy, T=Tube, P=Tube+Cap, R=Reel+Cap

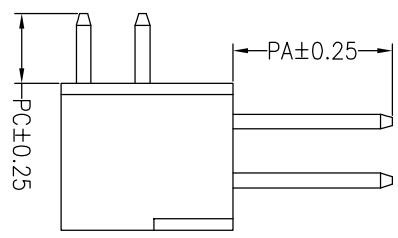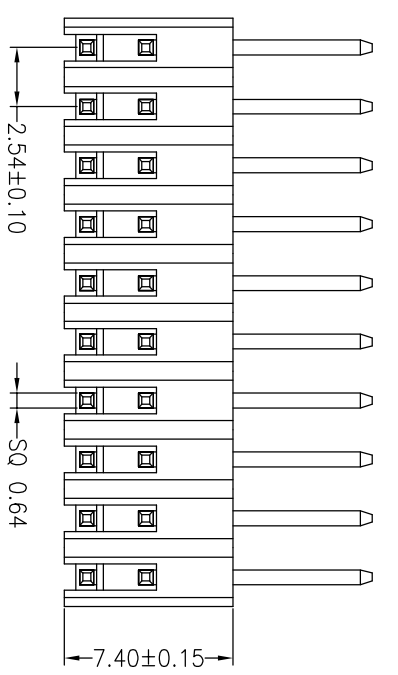

Dimension antitheses list

ITEM	PA	PC	L短	L长
Standard	6.00	3.60	15.30	20.30

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YYuSheng	18.11.11	SCALE	FIT	PART NO.	TITLE:
				UNIT	mm				SIZE	A4		
A0	2018.11.11	NEW DRAWING		X.X	±0.30	CHECK					127412XXXXXXRX01	
1				X.XX	±0.20							
				X:XXX	±0.10	APPROVE						
				Angle	±3°							
				DIM	TOL							