
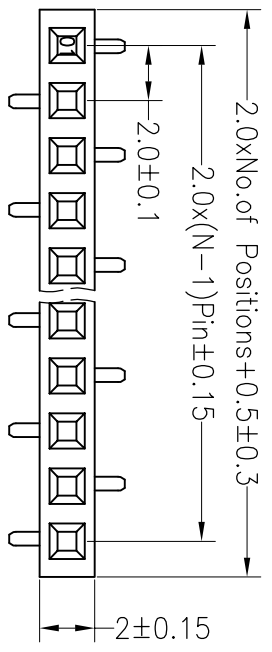




## SPECIFICATIONS

Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°c to +105°c

Contact Material: Phosphor bronze  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard: PA9T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

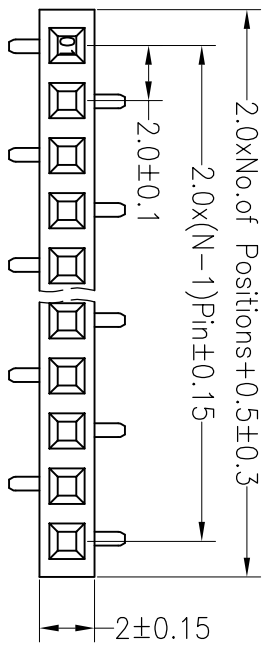



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)

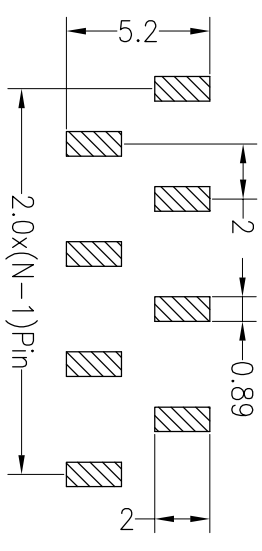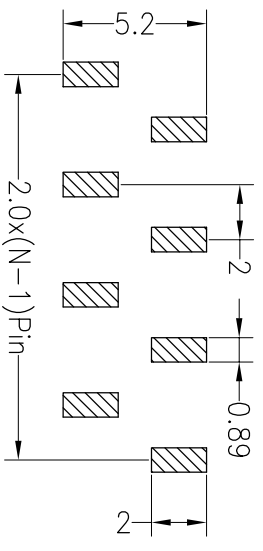

## Ordering Information

2358 01 XX X N XX M U X 0 X (1,2)

No. of Pins Per Row: 1\*1~1\*40  
 Insulator Material Option:  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 E=BK-PA9T  
 F=BK-LCP  
 Contact Plating:  
 G0: Gold Flash  
 G1: 3U" Gold  
 G2: 5U" Gold  
 G3: 10U" Gold  
 G4: 15U" Gold  
 G5: 30U" Gold  
 S0: Gold Flash/Tin  
 Packing:  
 0=PE Bag  
 A=Tray  
 T=Tube  
 P=Reel+Cap  
 R=Reel+Cap  
 M=Reel+Mylar

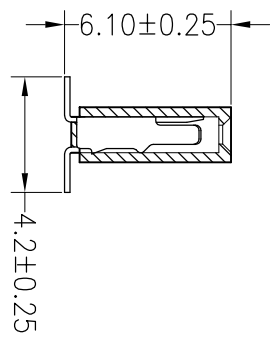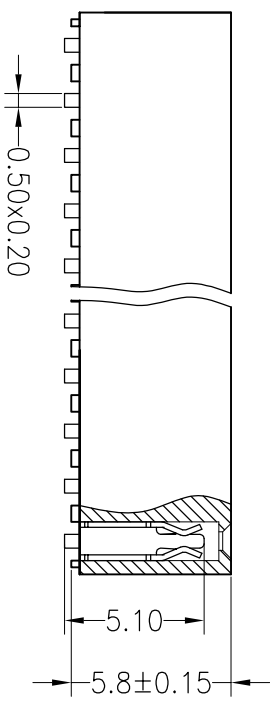

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YYuSheng	15.11.28	UNIT	mm	A4	1/1	235801XXXXXXMU01(2)	
X.XX	±0.20	CHECK		SIZE					
X.XXX	±0.10	APPROVE		SHEET					
Angle	±3°			PROJ.					
DIM	TOL								
CHANGE		APPROVE		TITLE:		2.00PF H5.80mm 1xNpin SMT			
REV	DATE	MODIFICATION DESCRIPTION		PROJ.					
1	2015.11.28	NEW DRAWING							

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892