

UL&CSA GRADE:

UL Style.....2651

Rate Temperature.....-20°C to 105°C

Rate Voltage.....Max 300V

Flame Test.....VW-1

CSA Standard.....C22.2 NO.210.2

Rate Temperature.....-20°C to 105°C

Rate Voltage.....Max 300V

Flame Test.....FT1.FT2


Physical Property:

Stranded Conductor

AWG Size.....28AWG

Material of Insulation.....Polyvinyl Chloride(PVC)


Insulation thickness average.....9 mil


Print: JILN TOP  AWM 2651 SB E472355 VW-1 105°C 300V 28AWG

# Ordering Information

G 1 2 2651 - 28 XX 0076 - 01

Pitch 2=1.0  
No. of Pins 4P~64P  
Length 0076=76.5m/Reel

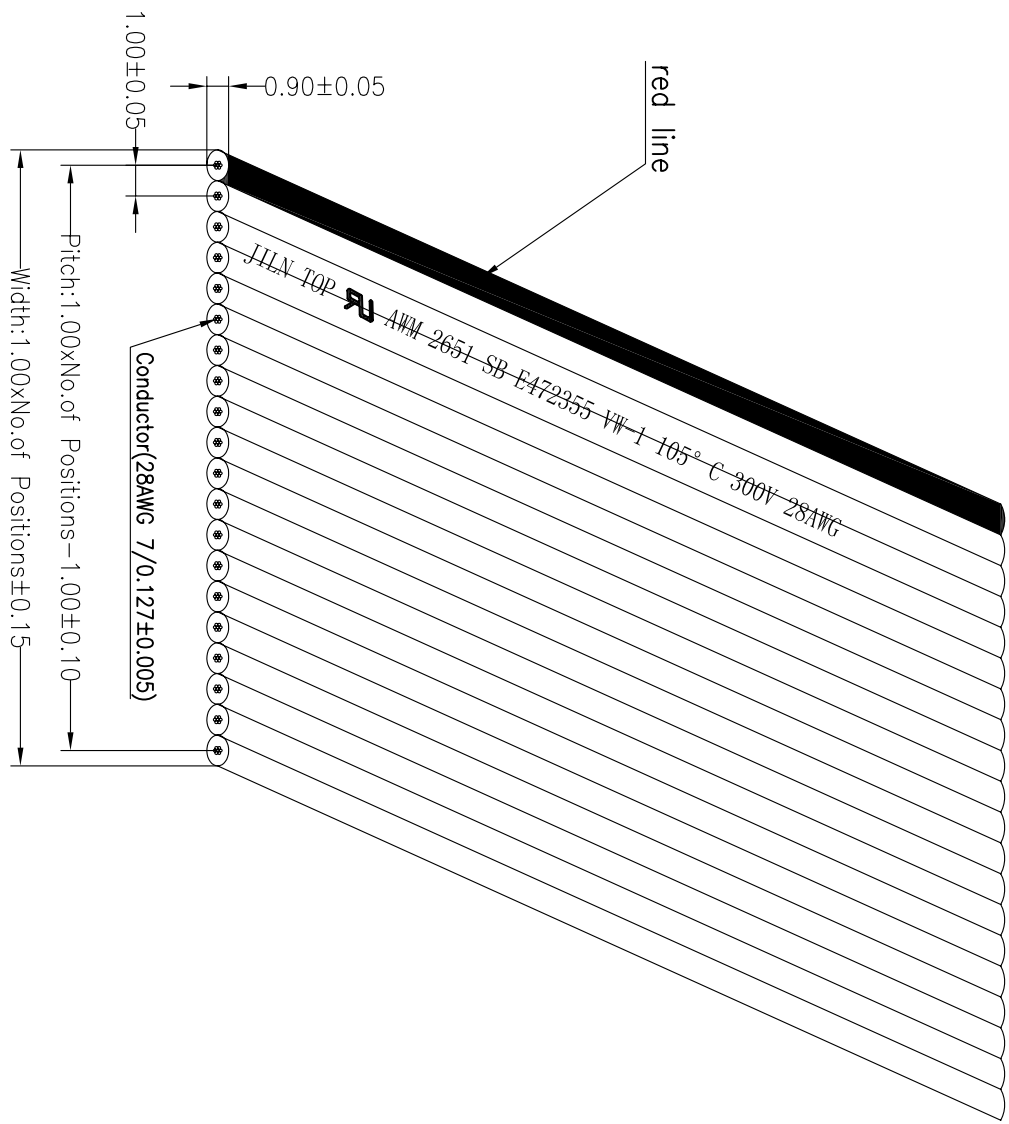

A		B		C		D		E		F		G	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE	YTYuSheng	15.01.28	SCALE	FIT	PART NO.	TITLE:
A0	2015.01.28	NEW DRAWING			X.X	±0.30	DRAW			UNIT	mm	G122651-28XX0076-01	1.00mm Flat Cable UL2651 28AWG
					X.XX	±0.20	CHECK			SIZE	A4		
					X.XXX	±0.10				SHEET	1/1		
					Angle	±3°	APPROVE			PROJ.			
<p><b>JILN</b> 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992</p>													